




HTC HD 2 Front panel Replacement

Written By: Mark Kruhse



Step 1 — Front panel

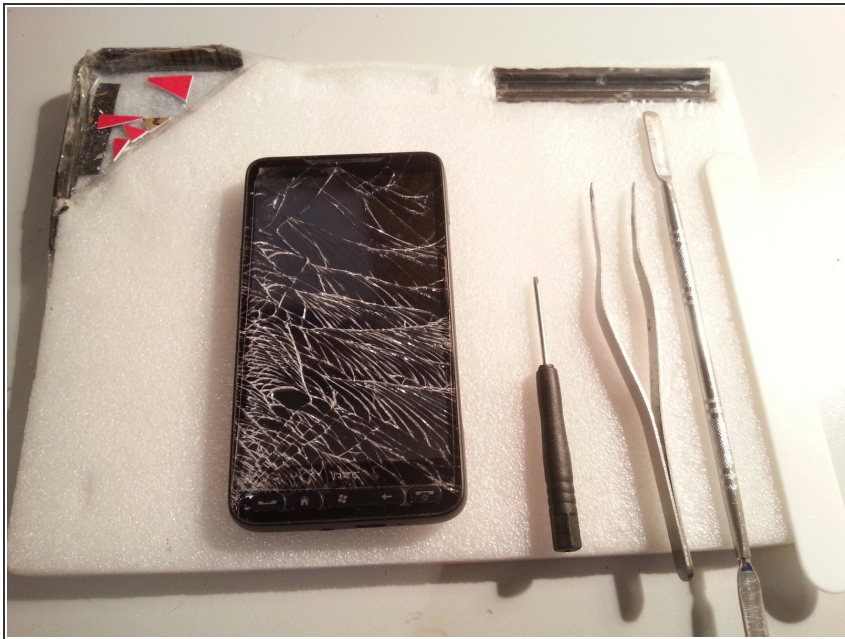

- HTC HD 2 Touch Glas Repair

Step 2




- Open Backcover and turn out the battery

Step 3 — These turn out 4 screws



- These turn out 4 screws

Step 4 — Push it out

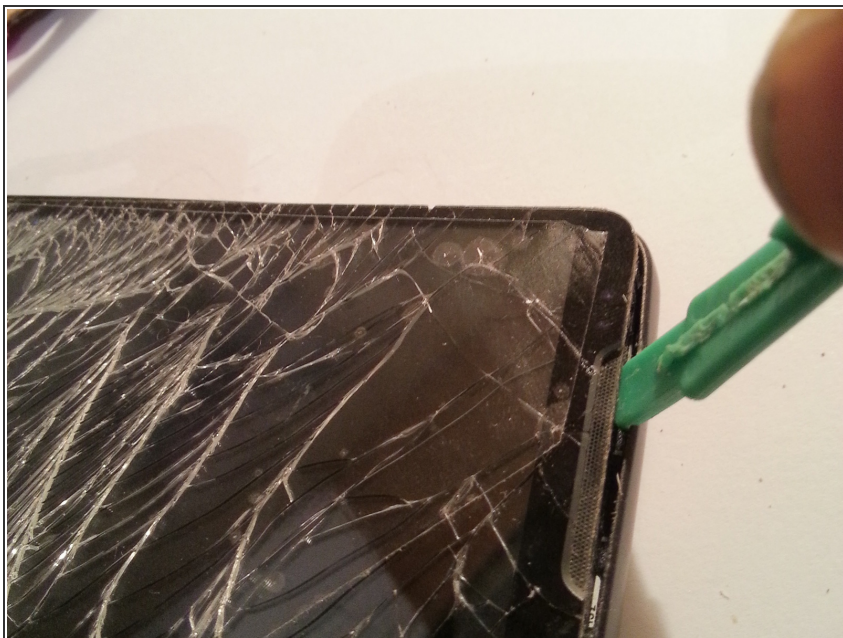



- With the tool at the top of a long slide and pry out

Step 5 — Be carefull





- In the pages exactly the same

Step 6 — Pull flex cable connections and caution.

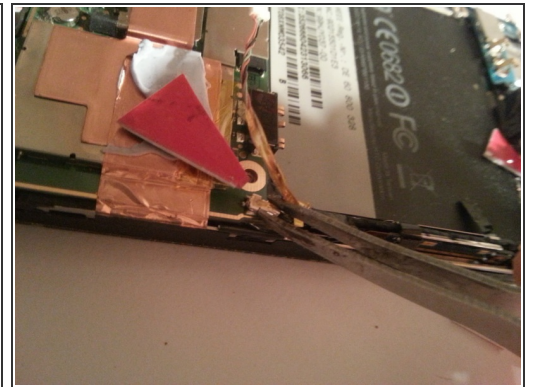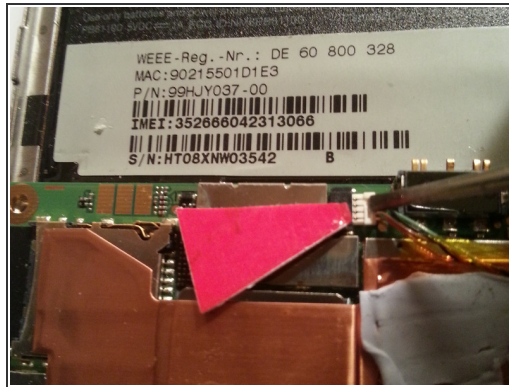

- Pull flex cable connections and caution.

Step 7 — Nur lösen / Anschluss Flex links von Laut/leise buttons

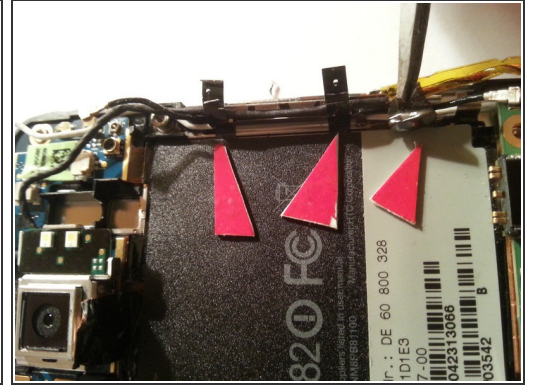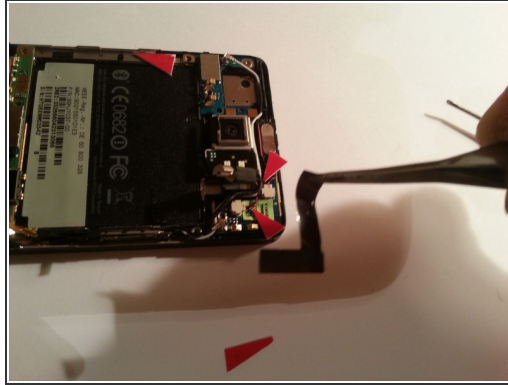



- Danach 3 tesa stripes lösen

Step 8






- Kabel vorsichtig aus dem Kabelschacht ...

Step 9 — Flex

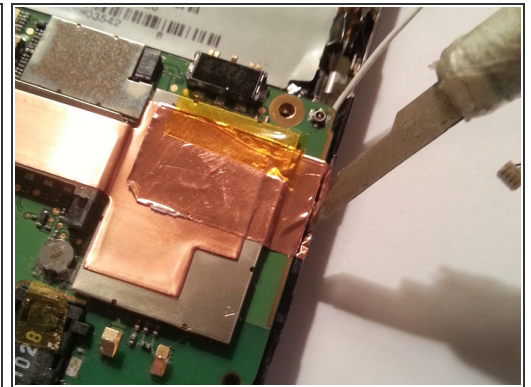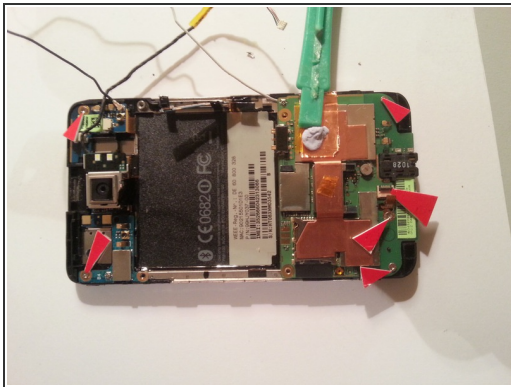



- FLEX

Step 10 — Raushebeln

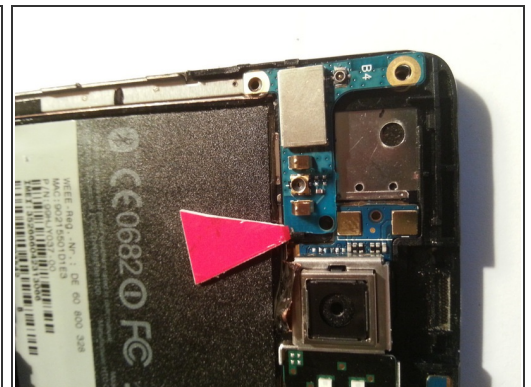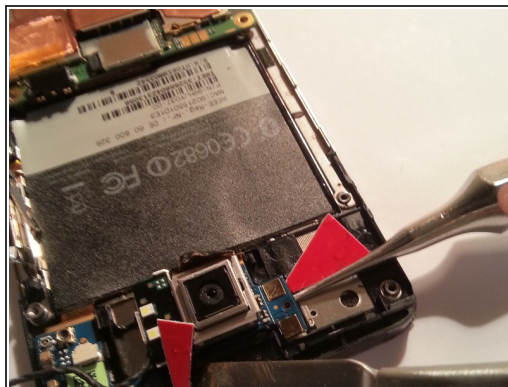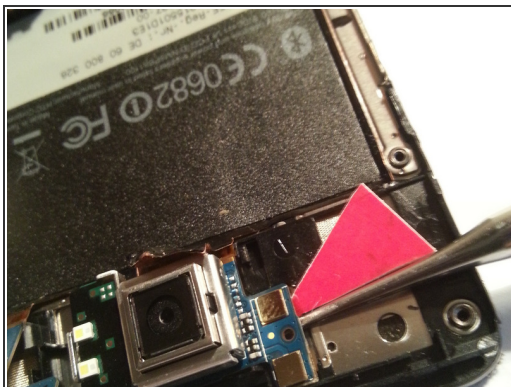




- Einzelnd

Step 11 — Weiter

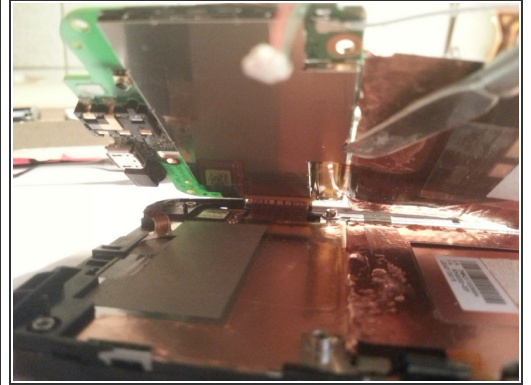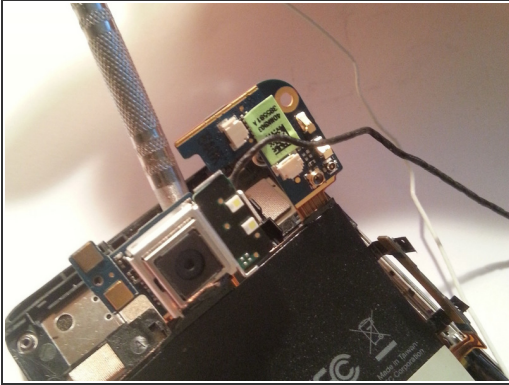

- Flex

Step 12 — Aufklappen

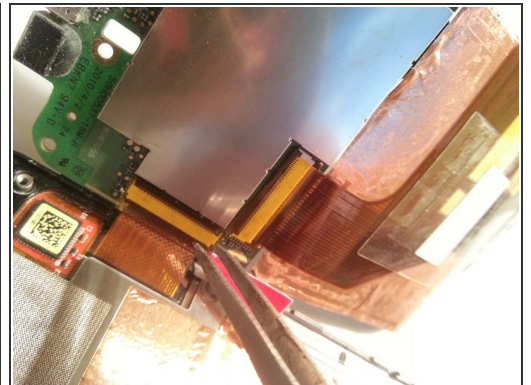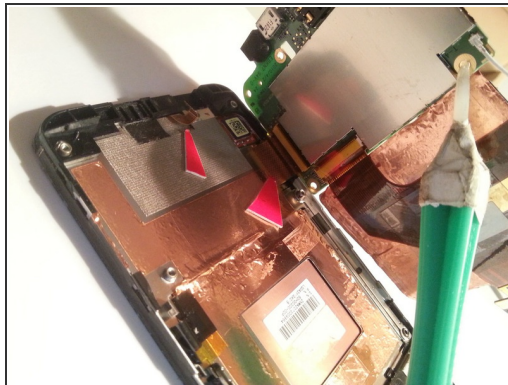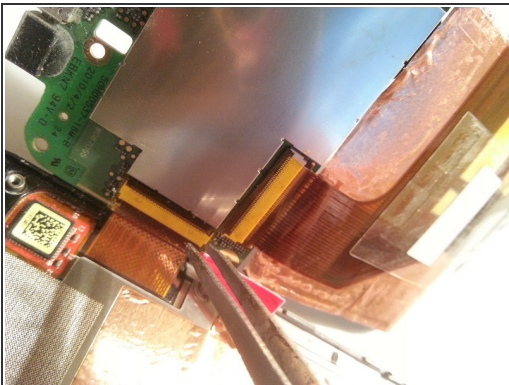

- Aufklappen

Step 13 — Lösen



- Vorsichtig

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 06:02:09 PM.